

**UNIQUE
&
PATENTED**

CLIP'N USE ETHYLENE OXIDE



The Clip'n use system, thanks to its design and ease utilization, allows the operators to handle the ethylene oxide safety.

**Open / Close
In only one gesture
Quick ⇔ Security**

3rd sealing level

2nd sealing level

1st sealing level

1

2



Teflon non-return device

To preserve the specification of the product inside the packaging and protected against external pollution

Patented internal delivery device

1 - Female coupling device
2 - Male quick coupling valve

TECHNICAL CHARACTERISTICS

Material	Stainless steel 316 L
Maximum working pressure	25 bar
Temperature of use	-15°C +65°C
Conform to the European regulation on pressure devices	99/36CE
Seals nature	Kalrez / PTFE

Female coupling device advantages


- Quick connection /disconnection
- With flat face obstruction → no polluting
- Zero rejection with the atmosphere.

Male quick coupling valve advantages

- With flat face obstruction → no polluting
- Zero rejection with the atmosphere.
- double sealing

Connection on liquid phase

Connection on gas phase

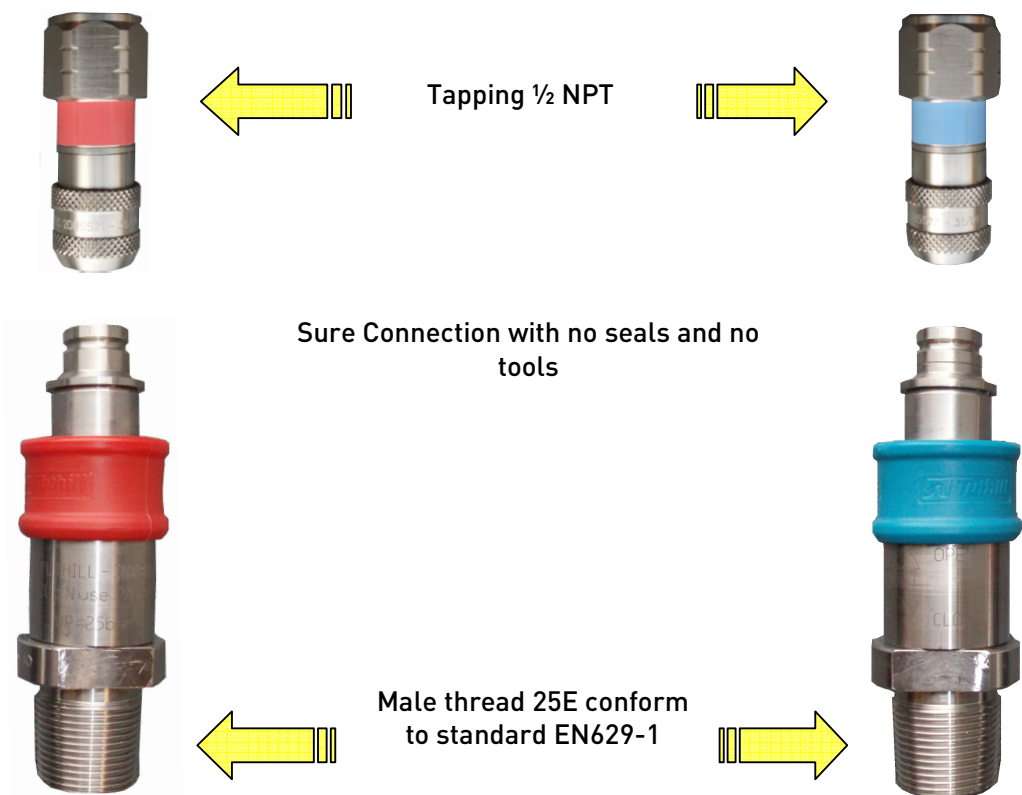

Foolproofing system : the connection of a hose equipped with a " phase gas " on the Male coupler " liquid phase " is impossible.

ETHYLENE OXIDE CAS 75-21-8	
Substance of Category 2 - Mutagenic and carcinogenic. - Extremely Flammable	
TWA (Time Weighted Average Exposure)	1ppm
ADR Classification	UN1040 - 2TF
Test pressure	15 bar
Maximum working pressure	10 bar